

Salus Product Datasheet

Emergency Exit Bulkhead - maintained or non maintained

Product Data

Warranty	3 years
Applications	Interior
Certification(s)	UKCA, CE, RoHS Compliant to: • ISO 7010 • BSI:5266:2011

Physical Data

Luminaire Fixing	Surface mounted
Construction Material	Polycarbonate
Diffuser Type	Polycarbonate
Max. viewing distance	18m
Unit Weight (Kg)	0.6

Electrical Data

Voltage Range	AC200-240V
Power Factor	>0.90
Inrush Current	<60A
Protection Class IEC	Class II

Performance Data

Efficacy	47-53 Lm/W
Operating Temperature	0°C to 40°C
Beam Angle	120°
Operating Hours	>30000
CRI	>70 Ra
IP Rating	IP65
Macadam Ellipse	≤4 sdc
L70 B50	70,000 hours
L80 B50	50,000 hours
L90 B50	25,000 hours

Emergency Data

Battery Duration	>3 hours
Battery Type	NCID
Type	Maintained Non maintained



With hinged screwless gear tray for ease of installation



Part Code

	Wattage	Kelvin	Lumens
R231201	3.5W	6500	160 (maintained) 140 (non maintained)

Dimensions (mm)

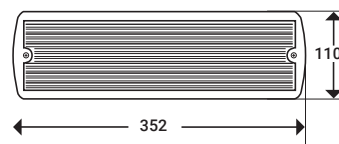


Salus Family

Part Code: R231201

Suffix	Option	
/NL	No legends	Salus comes with all legends as standard
/E-Z10	Z10 Integral emergency with remote control testing	

Example: **R231201/NL**
Salus Bulkhead without legends

Light Distribution:

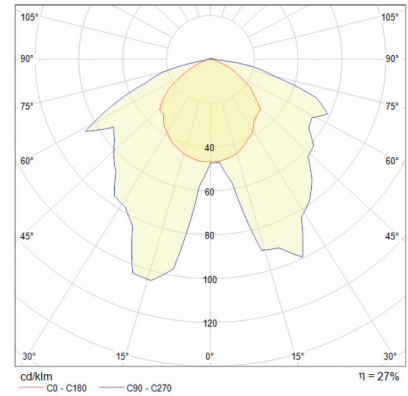

Salus add on items

Part code	Option
R23-01	Salus semi-recessed mounting frame
R10-Z10	Z10 Emergency remote control

