

# RICOMAN

## R3 All in One LED Downlight

# INSTALLATION INSTRUCTIONS



**PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION AND LEAVE A COPY WITH THE END USER FOR FUTURE REFERENCE.**

**SAFETY INFORMATION** – We recommend that luminaires be installed by a fully qualified and competent electrician who understands building regulations and the current IEE wiring regulations. The light source contained in this luminaire shall only be replaced by the manufacturer or a qualified professional.

**Before commencing any installation or maintenance work, ensure that the electricity is switched off at the mains.**

### IMPORTANT USER INFORMATION

Please install and use strictly in accordance with these instructions. Make sure that you have all the tools and equipment to complete the installation safely and correctly. Improper installation could cause harm to your property and/or person and void your warranty.

It is the installer's responsibility to consider fire and safety risks and take appropriate precautions.

**This product is a CLASS II Fitting.**

### PRE INSTALLATION INSTRUCTIONS & GUIDELINES

- Ensure the supplied LED driver is used to connect to the AC input.
- Ensure the hole size is cut to the specified size as a hole too big or too small can lead to installation issues.
- Do not disassemble or amend the structure of the luminaire as this can be dangerous and it would void your warranty.
- The luminaire must be installed in a ceiling, which should be firm enough to hold the weight of more than five times of the fitting itself.
- The luminaire must not be installed above hot objects such as ovens to avoid damage to the fitting.
- Ensure there is adequate space for ventilation around the fitting.
- The space height between the ceiling and the roof must be higher than 20mm above the height of the fitting.
- Ensure that ALL electrical connections are tight with no loose strands.

### SPECIFICATION

**Wattage:** 6W

**Power Supply:** AC220-240V

**Power Factor:** >0.90

**CCT:** Tuneable White (/TW)



3000K (/3K)

4000K (/4K)

**CRI:** >90Ra

**Driver:** Remote

**Body:** Aluminium



Cut out 70 mm


# R3 All In One Fire Rated LED Downlight

## INSTALLATION STEPS

Before following these steps please ensure you have read and adhered to the guidelines and information overleaf.


### STEP 1

Ensure power is turned off. Cut out a 70mm dimension mounting hole in the ceiling.




### STEP 2

Locate the power cable and connect the wires to the luminaire.



### STEP 3

Return power to the power supply when connection is correct.

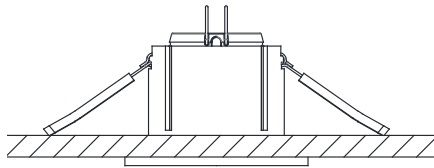

#### ENVIRONMENTAL PROTECTION

Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this marking must not be disposed of with other household or commercial waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Centre or retailer for recycling advice.

#### WARRANTY

This product is in warranty in the UK for a period of 5 year from the date of purchase. The guarantee is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the IEE Wiring Regulations. Should this product fail during the warranty period, it will be replaced free of charge, subject to the aforementioned conditions and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected.