

Kontor Product Datasheet

Free Standing Linear Light

Product Data

Part Code	R409000
Warranty	5 years
Applications	Interior
Certification(s)	UKCA, CE, RoHS

Physical Data

Construction Material	Aluminium
Diffuser Type	Polycarbonate Square Aperture -TP(a) Rated
Colour Finish	Black White as standard
Luminaire Fixing	Floor Standing
Unit Weight (kg)	10.6 Kg

Electrical Data

Wattage	70W (30W direct/ 40W indirect)
Power Factor	>0.90
Voltage Range	AC220-240V
Inrush Current	<30A
Running Current	1500mA
Protection Class IEC	Class II

Performance Data

Efficacy	~96 Lm/W
Lumens	6742 (40% direct/60% indirect)
Operating Temperature	-20°C to +45°C
Beam Angle	70°
Kelvin	2800K-6500K tunable
Dimmable	Yes (via touch panel)
Operating Hours	>50000
IP Rating	IP40
IK Rating	IK09
CRI	>90 Ra
UGR	<13
LED Chips	≤3 sdcm
Macadam Ellipse	100,000 hours
L70 B50	90,000 hours
L80 B50	42,000 hours
L90 B50	Single bin Samsung


*Direct & Indirect Light, Tunable Kelvin,
Dimmable as standard*




Features

- Photocell
- Presence detection PIR sensor
- USB charging port
- Supplied with cable and UK plug

Dimensions (mm)

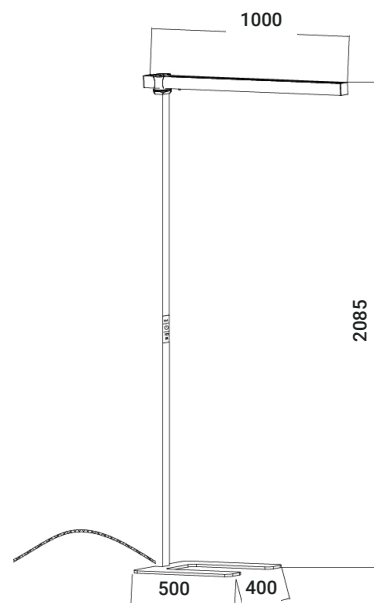


Kontor Family

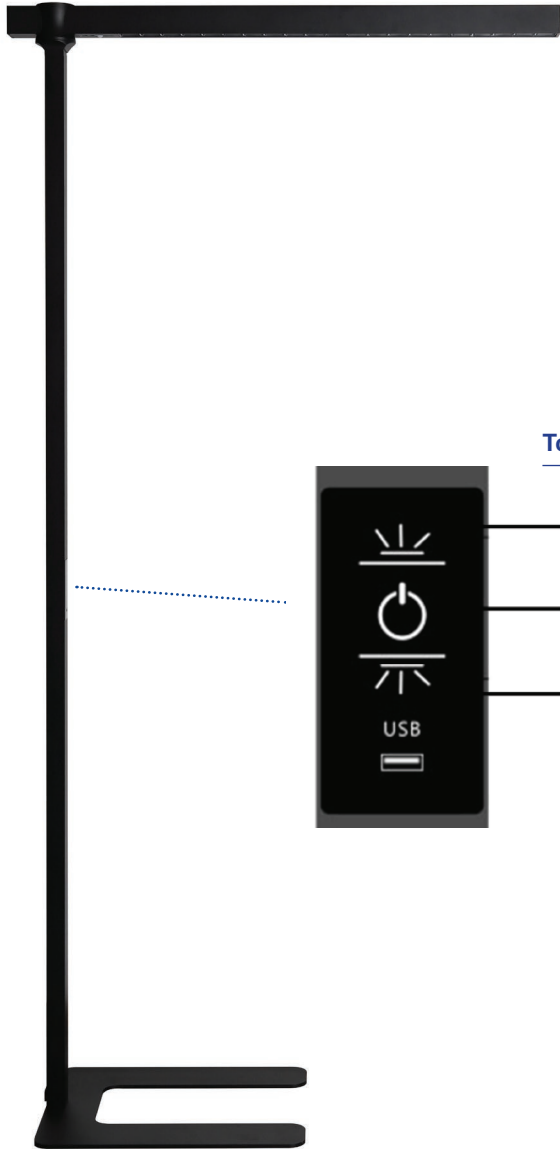

Touch Panel Controls

- | | |
|-------------|---|
| Quick press | Turn on/off the uplight |
| Long press | Adjust brightness of the uplight |
| Quick press | Turn on/off the uplight and downlight |
| Long press | Adjust the colour temperature for uplight and downlight |
| Quick press | Turn on/off the downlight |
| Long press | Adjust the brightness of the downlight |

Light Distribution:

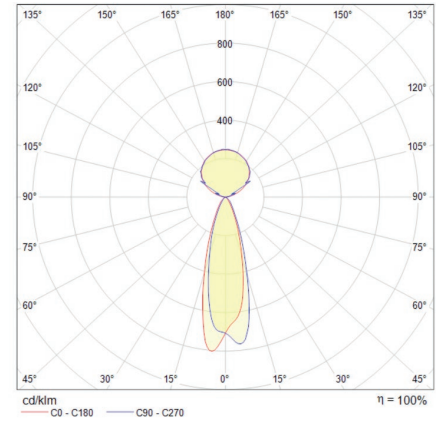

Kontor Family

Part Code: R409000

Suffix	Option
/WT	White body
/BK	Black body



Photocell Controls

- Sensing distance is 2.5m
- 0 - Sensor completely off
 - 1 - Ambient light sensing
 - 2 - Presence detection
 - 3 - Ambient light sensing + presence detection