

Centorio Remote Datasheet

Remote control to change colour temperature and dim R3 & Centorio Downlights

Product Data

Part Code	R09-882
Warranty	3 years
Applications	Centorio Downlight (interior)
Certification(s)	CE, RoHS
Dimming Range	3%-100%
°Kelvin Range	3000K - 5000K
Operation	Up to 100 downlighters
Channels available	4 (4 rooms or 4 sections in a room)
Max sensing range	15 meters at 2.4GHz
Night light function	Yes (3% dim)
Batteries	2xAAA (not included)
Control Holder	Included

Controls up to 100 downlighters in 4 rooms/areas



R3



CENTORIO

BUTTON FUNCTIONS

Master ON

Press and ALL lights will switch on. Press and hold to automatically increase luminaire(s) to synchronisation.

CT WW

Press to adjust the light to a warmer colour temperature.

CT CW

Press to adjust the light to a cooler colour temperature.

Master OFF


Press and ALL lights will switch off. Press and hold to put luminaire(s) into night light mode (3% light output).

Light +

Press to increase the light brightness.

Light -

Press to decrease the light brightness.

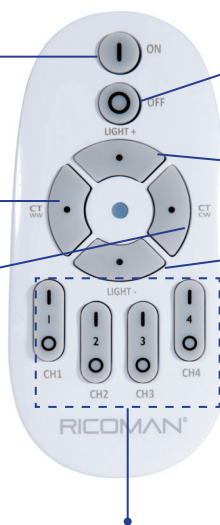

Channel ON/OFF

Individual control of channels 1, 2, 3 & 4. This button has the functions as Master ON/OFF but controlling the selected channel.